



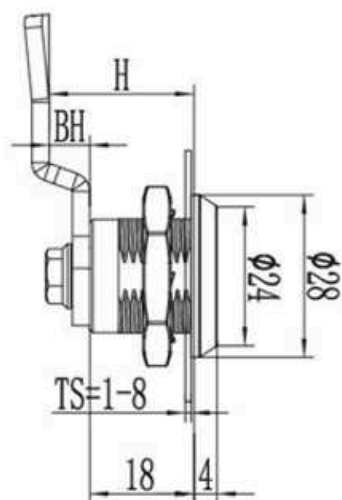

(Model)

**(705-3E-1)**

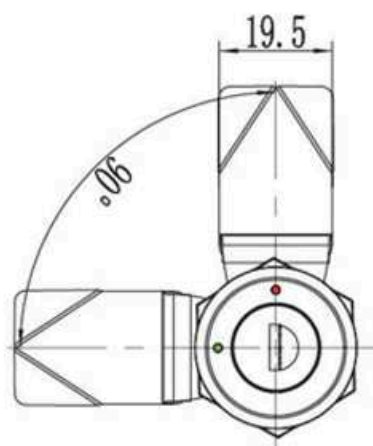

| Type selection | Left open  | Right open |
|----------------|------------|------------|
| Universal      | D3-1510-1L | D3-1510-1R |
| Exclusive      | D3-1510-2L | D3-1510-2R |

1. Material and surfacetreatment:  
Stainless steel 316 or 304
2. Performance parameters:  
Protection level: IP65
- 3.installation instructions:  
Fixing screw torque 8N.M  
Fixing nut torque 17N.M  
Applicable doorthickness: 1-8mm

